

AVAILABLE IN EFFICIENCIES FROM 95% - 99.999%

MEDICAL GRADE

STANDARD AND HIGH CAPACITY

6" AND 12" DEPTHS

GALVANIZED STEEL FRAME IS STANDARD; OTHER MATERIALS AND HEADERS ARE OPTIONAL

ALUMINUM SEPARATORS ENSURE EVEN PLEAT SPACING AND UNIFORM AIRFLOW

100% RELATIVE HUMIDITY AND MAXIMUM TEMPERATURE OF -200F

ALL FILTERS ARE INDIVIDUALLY TESTED AND LABELLED WITH EFFICIENCY, PART NUMBER TO VALIDATE HEPA EFFICIENCY PERFORMANCE


RECOMMENDED FINAL PRESSURE DROP: 2.0"W.G.



APPLICATIONS

Commercial HVAC systems typically found in health care, pharmacy, chemical manufacturing, food processing, laboratories, aerospace, gun ranges

FILTER PERFORMANCE DATA 24 X 24 X 12 GALVANIZED

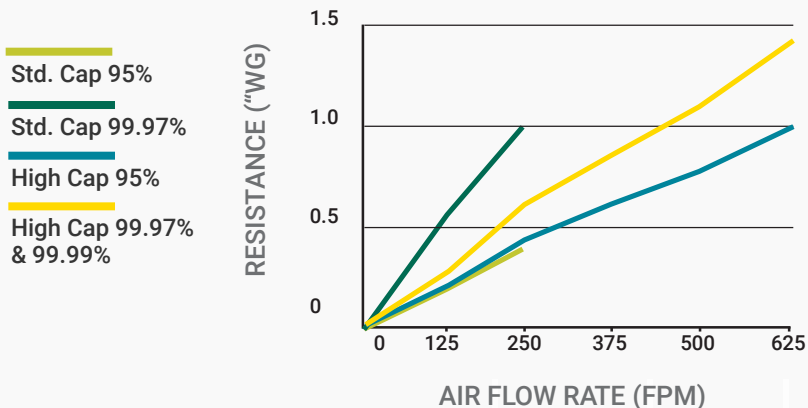

CAPACITY	EFFICIENCY	250 FPM	FINAL RESISTANCE (w.g.)
STANDARD CAPACITY	95%	0.55	2
	99.97%	1	2
	99.99%	1	2

CAPACITY	EFFICIENCY	500 FPM	FINAL RESISTANCE (w.g.)
HIGH CAPACITY	95%	1	3
	99.97%	1.5	3
	99.99%	1.5	3